



Sax2vertical

Interior design radiator


A sober profile, decided lines and great dimensional modularity are the characteristics that make Sax a unique and contemporary product. The range includes both vertical and horizontal models and versions with a single or double row. The latter is ideal for environments that require a high heating performance.

Technical features:

- manifolds with a 30 mm diameter circular section
- tubes made of sheet steel with a 20x25 mm rectangular section
- manifold threading 1/2" Gas right
- maximum working pressure 4 bar
- maximum working temperature 95°C

Standard supply:

- Fixing brackets complete with screws and anchors
- 1/2" blind plug
- 1/2" air vent

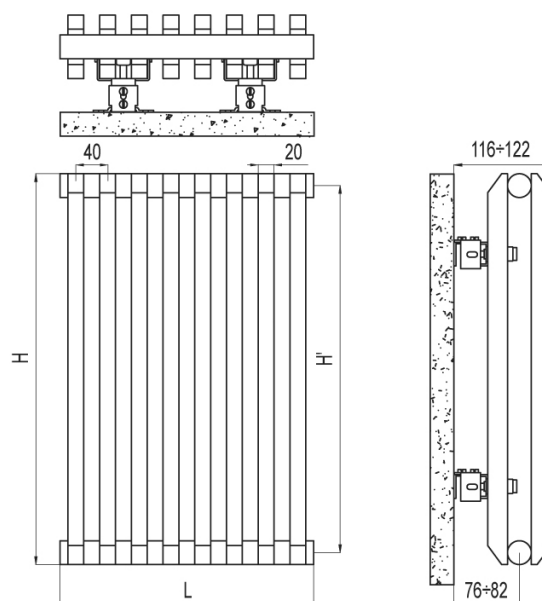

500	SX20500 yy IR 01	80	500	470	0.82	0.44	44	33	23	14	1.278
530	SX20530 yy IR 01	80	530	500	0.86	0.47	46	34	24	14	1.279
630	SX20630 yy IR 01	80	630	600	1.00	0.55	54	40	28	17	1.282
650	SX20650 yy IR 01	80	650	620	1.03	0.57	55	42	29	17	1.283
680	SX20680 yy IR 01	80	680	650	1.07	0.59	58	43	30	18	1.284
730	SX20730 yy IR 01	80	730	700	1.14	0.63	61	46	32	19	1.285
830	SX20830 yy IR 01	80	830	800	1.28	0.71	69	52	36	21	1.289
850	SX20850 yy IR 01	80	850	820	1.31	0.73	70	53	36	22	1.289
900	SX20900 yy IR 01	80	900	870	1.38	0.77	74	56	38	23	1.291
1500	SX21500 yy IR 01	80	1500	1470	2.22	1.26	116	87	60	35	1.297
1800	SX21800 yy IR 01	80	1800	1770	2.64	1.50	136	102	70	41	1.298
2000	SX22000 yy IR 01	80	2000	1970	2.92	1.66	148	111	76	45	1.301
500	SX20500 yy IR 01	80	500	470	0.82	0.44	44	33	23	14	1.278
530	SX20530 yy IR 01	80	530	500	0.86	0.47	46	34	24	14	1.279
630	SX20630 yy IR 01	80	630	600	1.00	0.55	54	40	28	17	1.282
650	SX20650 yy IR 01	80	650	620	1.03	0.57	55	42	29	17	1.283
680	SX20680 yy IR 01	80	680	650	1.07	0.59	58	43	30	18	1.284
730	SX20730 yy IR 01	80	730	700	1.14	0.63	61	46	32	19	1.285
830	SX20830 yy IR 01	80	830	800	1.28	0.71	69	52	36	21	1.289
850	SX20850 yy IR 01	80	850	820	1.31	0.73	70	53	36	22	1.289
900	SX20900 yy IR 01	80	900	870	1.38	0.77	74	56	38	23	1.291
1500	SX21500 yy IR 01	80	1500	1470	2.22	1.26	116	87	60	35	1.297
1800	SX21800 yy IR 01	80	1800	1770	2.64	1.50	136	102	70	41	1.298
2000	SX22000 yy IR 01	80	2000	1970	2.92	1.66	148	111	76	45	1.301

For Δt different from 50°C use the formula: $Q=Q_n (\Delta t / 50)^n$